

Digital Multimeter Series

734/733/732 Series

- 734 Series of 4.5-digit Handheld Multimeters
- 733/732 Series of 3.5-digit Handheld Multimeters



73402



0.020% Maximum Measurement Accuracy
734 02

73303



RMS Data Measurement
733 03

73201



Low-end Model
732 01




■ 3.5-digit or 4.5-digit Digital Multimeter Product Line

753704



7537 Series

753603



7536 03

74001



740 Series

Integral Action Time

Digital multimeters (DMMs) employ an A/D converter with a dual-integration system, which determines the measurement value by converting the input voltage into time using an integration AD converter. The interval to perform an integral action periodically is referred to as the integral action time.

Measurement Accuracy

With DMMs, the measurement accuracy is generally expressed as: \pm ___% of reading + ___digits. ("Reading" refers to the reading value, and is abbreviated as "rdg"; "digits" refers to the number displayed in the smallest decimal place, and is abbreviated as "dgt.") This expresses the range of values that a DMM may measure or represent for a given actual value.

Root Mean Square Value

The value most directly related to the energy of a given waveform. Refers to the square root of a value found by averaging the squares of instantaneous values of a waveform over a single cycle. (See Table 1, Figures 1 and 2.)

Mean Value

Refers to the average of the sum of instantaneous values, determined for a current half-wave. It is equivalent to calculating the surface area of a waveform.

Form Factor

Ratio of RMS value with respect to average value.
Form factor = RMS value/mean value (See Figures 1 and 2.)

Crest Factor

Ratio of maximum value to RMS value.
Crest factor = maximum value/RMS value(See Figures 1 and 2.)

Peak-to-Peak (P-P) value

Refers to the distance between the smallest and largest amplitudes in a waveform (see Figure 1).

Frequency Characteristic

Refers to a characteristic that shows variations in input, measurement, or response with frequency. When measuring alternating current signals, a measured signal does not have a simple frequency, but often includes various frequencies ranging from lower frequencies to higher harmonics. To measure such signals more accurately, it is preferable to use a measurement device that has a broader frequency characteristic range.

Input Impedance

To prevent the measured object from being influenced during voltage measurement, you should use a measurement device with an extremely high input impedance.

Decibel

A unit used for describing the change in electrical signal amplitude or noise level, or transmission systems in wired devices, etc. This parameter is also used to represent the level differences in voltage, current or related values, but is generally restricted to cases characterized by the relationship: $(I_1/I_2)^2 = (V_1/V_2)^2 = P_1/P_2$. In the abbreviation "dB," "d" (deci) denotes 1/10, and "B" (Bell) denotes logarithm.

Table 1. RMS Value, Average Value, Waveform Factor and Crest Factor for a Typical Periodic Waveform






Item	Waveform	RMS	Mean value	Waveform factor	Crest factor
Sine wave		$\frac{1}{\sqrt{2}} = 0.707$	$\frac{2}{\pi} = 0.637$	$\frac{\pi}{2\sqrt{2}} = 1.11$	$\sqrt{2} = 1.414$
Half rectification wave		$\frac{1}{2} = 0.5$	$\frac{1}{\pi} = 0.318$	$\frac{\pi}{2} = 1.571$	2
Full rectification wave		$\frac{1}{\sqrt{2}} = 0.707$	$\frac{2}{\pi} = 0.637$	$\frac{\pi}{2\sqrt{2}} = 1.11$	$\sqrt{2} = 1.414$
Triangular wave		$\frac{1}{\sqrt{3}} = 0.577$	$\frac{1}{2} = 0.5$	$\frac{2}{\sqrt{3}} = 1.155$	$\sqrt{3} = 1.732$
Square wave		1	1	1	1

Figure 1. RMS and Mean Values of Sine Wave


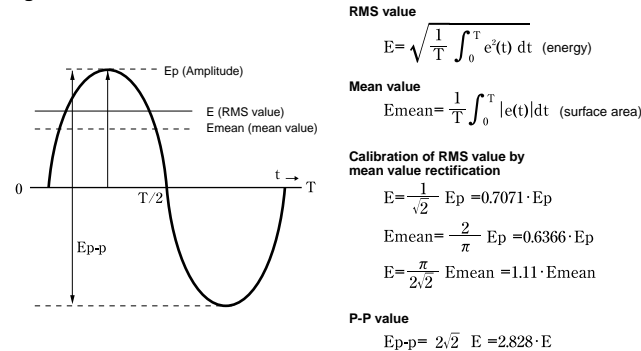


Figure 2. RMS of Distorted Waves

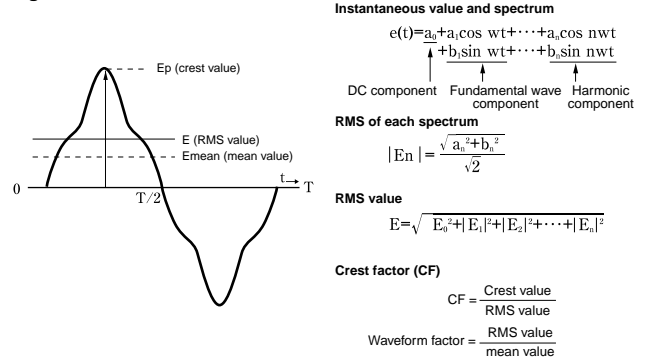

CE Mark

The products of Yokogawa M&C Corporation are subjected to design and evaluation testing to ensure compliance with the safety and EMC standards in accordance with the directives issued by the EC.

Electromagnetic Compatibility (EMC)


The parameters EMI and EMS are referred to as electromagnetic compatibility as they relate to compatibility within an electromagnetic environment.

Safety Standards

These standards lay out safety requirements that are to be met by a product with the objective of the preservation of human life and property. The applicable international standard is IEC 61010, and while a product must conform to this standard, there are also domestic standards laid out by individual countries. With these safety regulations, the range of use of a measurement device is specified by categorization in overvoltage categories I through IV to ensure the safety of the user. The designations "CAT II, 1000 V" or "CAT III, 600 V" at the input terminals of a measurement device, for example, indicates the applicable category and the maximum voltage for the device in terms of safety.

Overvoltage categories (CAT)

In order to ensure the safety of the user, IEC 60664 defines the ranges of use of measuring instruments by classifying power levels into overvoltage categories I through IV. This is because the excessive impulse or surge levels induced in a power line vary depending on the location of measurement (category). Categories with higher numerals designate locations that include larger surge voltages. Instruments that are designed for category III can thus withstand higher surge voltages than instruments designed for category II.

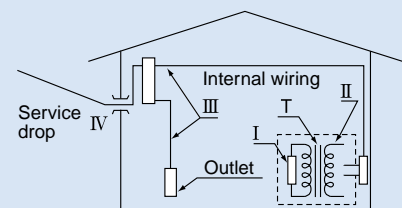

- Overvoltage category I (CAT I):**
Secondary circuits connected to an outlet via a power transformer.
- Overvoltage category II (CAT II):**
Primary circuits of a device connected to an outlet with a power cord.
- Overvoltage category III (CAT III):**
Primary circuits of a device to which power is directly supplied from the power distribution panel, and circuits from the distribution panel to outlets.
- Overvoltage category IV (CAT IV):**
All service line entrance circuits through the power distribution panel

Model

734 01
734 02

4.5 digits

50,000 count

RS-232C

RMS

Terminal shutters

0.020% (734 02, DCV)

0.040% (734 01, DCV)

3-year Warranty



Safe Design

Shutters prevent erroneous insertion of test leads into current measurement terminals (terminal shutters)

The current terminals have terminal shutters that prevent erroneous setting of the measurement function and leadwire connections resulting from operational errors. The terminal shutters open and close according to the function switch position.

Conforms to EN61010-1 safety standard

Conforms to overvoltage category 1000 V AC/DC, CAT II and 600 V AC/DC, CAT III

Loaded with Measurement Functions

Peak hold function (73402, for DC V/A measurement)

Supports waveforms of 1 ms or greater. You can capture instantaneous crest values not possible with ordinary maximum measurement functions.


Relative and percentage value computation

Can display the measured values as the values relative to a reference value (defined by the REL key; even after data hold) or as the percentages of the reference value.

Percentage calculation: (Measured value – reference value) / (reference value), expressed as percentage.

Duty ratio (%) measurement

Displays the duty ratio of a pulse waveform:
(High level period/1 cycle of waveform) x 100 = (t2/t1) x 100 [%]



AC+DC measurement

Measures RMS of a waveform in which ripple waveforms are superimposed on a direct current.

Auto hold

Automatically hold the data measured when the test leads are disconnected from the measured object, thus freeing both hands for performing reliable measurement.

Maximum Measurement Accuracy

0.020% rdg + 2 dgt (734 02; DC voltage)
0.040% rdg + 2 dgt (734 01, DC voltage)
RMS measurement for AC and AC+DC measurement
Superior frequency characteristic allows AC measurements from 10 Hz.

Highly Reliable

Calibration screws/dials eliminated

Performance not influenced over time by external factors such as vibration or degradation of electrical contacts of calibration screws/dials.

- Recommended calibration period: 1 year – double the time for conventional 4.5-digit DMMs

Easier Calibration

User calibration function

The 734 series, simply performing special operations via front panel allows for quick and reliable adjustment. In addition, the series allows for one-touch adjustment of AC voltage- and AC current-to-frequency characteristics that could not be adjusted automatically in the past. The user calibration function leads to improved operation efficiency and cost reduction.

- External standard instrument required for calibration.

Full Support of Data Management

Measured data stored in internal memory

Storage Method:

50 data in manual-mode memory + 600 data in logging-mode memory

You can transmit stored data from internal memory to a personal computer, and process them using application software or spreadsheet software (Excel*) for data management.

Supports real-time measurement

Allows you to connect to a personal computer for storing large amounts of data that cannot be stored in DMM internal memory.

- Optional communication package sold separately (Model 92010: communication cable and DMM application software) is required for data transfer.
- The communication cable employs an infrared system, so the device is electrically insulated.

* Excel is a registered trademark of Microsoft Corporation, the United States.

Minimum/maximum/average display

Allows recording of minimum, maximum and average values along with their respective times (time passed since the start of measurement)

Decibel calculation

Computes the logarithm of an alternating current, and uses it together with the relative value computation to display the relative value. You can select the standard resistance according to the application, such as audio or communication circuit signal measurement.

* Selectable standard resistance values:

4/8/16/32/50/75/93/110/125/135/150/200/250/300/500/600/800/900/1000/1200Ω

Full Display Functions

50,000-count, 51-segment bar graph display

Allows simultaneous display of frequency and voltage, frequency and duty ratio or decibels and voltage on dual display.

In addition to the above, the sub-display can display the reference value for differential calculation, memory storage numbers for measured data, minimum/maximum/average value recording times, and standard resistance during decibel calculation.

Back-lit display (734 02)

Shockproof elastomer casing

An elastomer material is used for the outer casing in order to provide shock absorption and a good grip, in keeping with the requirements of handheld devices.

Communication Functions and Application Software Allow Analyses and Management of Measurement Data

Data Storage Method

Data storage to DMM's internal memory

50 data values in manual-mode memory
 60 data values in logging-mode memory units

Transmit to a personal computer all at once
 Print out with a printer (Model 97010)

Saving real-time measured data to personal computer

Real-time measured data (only logging measurements)

Transmit to a personal computer in real time
 Print out with a printer (Model 97010)

The number of data that can be stored for real-time measurement depends more specifically on the life of the batteries in the DMM.
 Reference: The cell life of alkaline batteries is approximately 100 hours when transmitting data in real time while measuring DC voltages at 1-second periods.

Data Management

Management with special application software

You can display measured data as a table and trend graphs. Real-time data transmission allows you to see moment-to-moment changes at a glance. In addition, when displaying DMM data on a PC screen they are enlarged to allow you to easily discern new data.


Data management with Excel* spreadsheet software

The 92010 is provided with a function to import data to an Excel* spreadsheet file, and graphs can be automatically drawn on the spreadsheet. This allows you to use Excel's extensive editing functions to prepare reports in original formats with ease.



Note: During real-time measurement, importing data to an Excel spreadsheet generates only a table containing the measured values. Generation of a graph is possible after completion of measurement.

* Excel is a registered trademark of Microsoft Corporation, the United States.

Data Layout Example on Excel* Spreadsheet

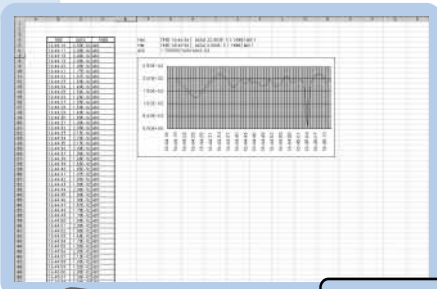

Example of Document Windows in DMM Application Software

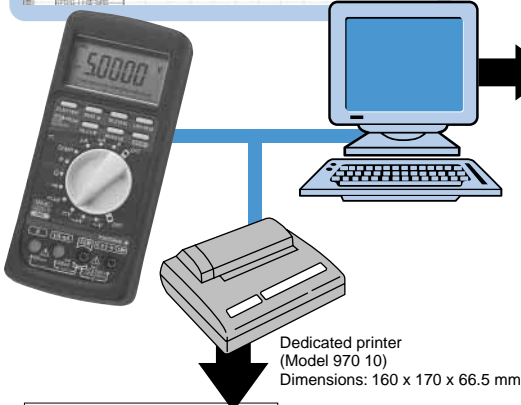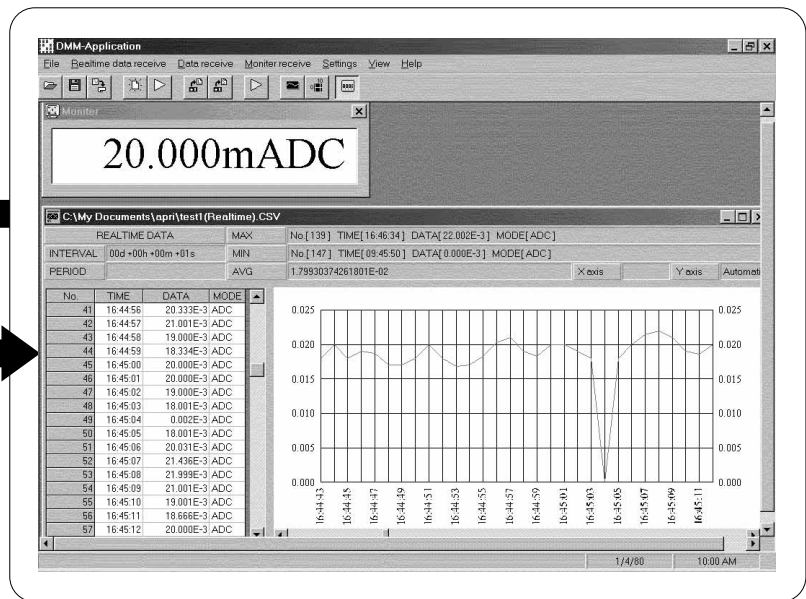

Example Printout of Stored Logging Data

L001 N,+0.9998 VDC
 L002 N,+0.9997 VDC
 L004 N,+0.9999 VDC
 L005 N,+0.9999 VDC
 L006 N,+0.9998 VDC
 L007 N,+0.9998 VDC
 L008 N,+0.9998 VDC
 L009 N,+0.9998 VDC
 L010 N,+0.9999 VDC
 L011 N,+0.9998 VDC
 L012 N,+0.9998 VDC
 L013 N,+0.9998 VDC
 L014 N,+1.0000 VDC
 L015 N,+0.9999 VDC
 L016 N,+1.0000 VDC
 L017 N,+1.0000 VDC
 L002 VDC

Characters represent the following information, starting from the left.

- L: Logging memory
- 3-digit numeral: Data number
- N: Normal measured value (O : "OL" indication on the DMM display)
- 5-digit numeral: Measured value
- VDC: Unit (example shows DC voltage)

92010 Communications Package Specifications

Communication cable

Cable length: Approximately 1.5 m
 Connector on the side of the PC: D-sub 9-pin

- A separate RS-232C cable (Model 91015) is required for connection to a printer.

Application software

System requirements of PC

Model: PC/AT compatible
 Operating system: Windows* 98 or 95
 CPU: Pentium 100 MHz or higher recommended
 Memory: 16 MB or larger recommended
 CRT: 800 x 500 pixels of resolution or higher recommended

Logging interval Any setting from 1 second, minimum

- A computer with a higher CPU should be used if the computer fails to receive measured data.

* Windows is a registered trademark of Microsoft Corporation, the United States.

General Specifications of

Models 734 01 / 734 02

Optional Accessories

Additional Functions	RS-232C, data memory, max/mini value memory, relative /percentage value computation, logarithm computation, data/auto hold, peak hold (73402), overvoltage warning, backlight(73402)
Display	Digital display: 50,000-count digital reading and 51-segment bar graph
Measuring Rate	Digital display: 3 times/sec Bar graph display: 10 times/sec
Operating Temp. and Humidity	-10°C to 50°C; 80% RH or less at -10°C to 40°C, or 70% RH or less at 40°C to 50°C (no condensation)
Storage Temp. and Humidity	-25°C to 60°C, 70 RH or less (no condensation)
Temperature Coefficient	Add the accuracy 0.05%/°C to the basic accuracy at a temperature within -10°C to 18°C and 28°C to 50°C
Withstanding Voltage	5.55 kV, AC for 1 minute (between input terminals and casing)
Power Supply	Two AA (R6) dry cells
Battery Life	Approx. 120 hours (for continuous DC voltage measurement with alkaline cells)
Auto Power Off	The power is automatically turned off when no operation is made for approx. 20 minutes (can be disabled).
Dimensions	85 (W) x 191 (H) x 40 (D) mm
Weight	Approximately 450 g (including batteries)
Compliance with Standards	Safety EN61010-1 (1995); EN61010-2-031 (1995) (AC/DC 1000 V, CAT II; AC/DC600 V, CAT III) EMC EMI: EN55011 (1998); EN61326-1 (1998) + A1 (Class B, Group 1) EMS: EN50082-1 (1997); EN61326-1 (1998) + A1
Standard Accessories	Instruction manual:1, Test lead set (RD031):1, AA (R6) dry cells(built in):2

Name	Model	Specification
DMM communication package	920 10-E	RS-232C cable + DMM software
	920 10-E/P	As above + printer connector cable
	7511 02	For liquids: -50°C to 800°C
	7511 03	For liquids: -50°C to 600°C
	7511 04	For surfaces: -20°C to 600°C
Temperature probe	7511 05	For surfaces: -20°C to 200°C
	B9646HH	Houses the DMM and test leads.
	930 14	Houses the DMM, probes, and RS-232C cable.
Test leads	RD031	Red / black (1 set)
Fuse	A1518EF	500 mA/600 V
	A1519EF	15 A/600 V
Printer	970 10	
AC adapter for printer	940 05	100 V AC \pm 10%
Thermal printing paper	970 80	10 rolls
RS-232C cable	910 15	For printer connection (male-male; 9-pin D-sub)

Performance

Test conditions: Temperature and humidity = 23°C \pm 5°C, 80% RH or less; Accuracy = \pm (% rdg + dgt).
Note: A response time is the time required for achieving the accuracy specified for the corresponding range.

• DC Voltage Measurement (— V)

Range	Accuracy		Input Resistance	Maximum Input Voltage
	734 01	734 02		
500.00 mV	0.04 + 2	0.02 + 2	Approx. 100 M Ω	1000 Vrms AC, 1000 V DC
240.00 mV				
5.0000 V	0.07 + 2	0.025 + 5	10 M Ω	1000 Vrms AC, 1000 V DC
50.000 V				
500.00 V				
1000.0 V		0.03 + 2		

Response time: 1 second or less
NMRR: 80 dB or greater for 50/60 Hz \pm 0.1%
CMRR: 120 dB or greater for 50/60 Hz (Rs = 1 k Ω)

• AC Voltage Measurement (— V)

Range	Accuracy				Input Impedance	Maximum Input Voltage
	10 – 20 Hz	20 Hz – 1 kHz	1 – 10 kHz	10 – 20 kHz		
500.00 mV	*1 1.5+30	*1 0.7+30	*1 0.7+30	*2 2+50	11 M Ω , <50 pF	1000 Vrms AC, 1000 V DC
5.0000 V						
50.000 V					10 M Ω , <50 pF	1000 Vrms AC, 1000 V DC
500.00 V						
1000.0 V	*2	*2	3 + 30 *2	—		

Range	Accuracy					Input Impedance	Maximum Input Voltage	
	10 – 20 Hz	20 Hz – 1 kHz	1 – 10 kHz	10 – 20 kHz	20 – 50 kHz			
500.00 mV	*1 1 + 30	*1 0.4 + 30	*1 0.4 + 30	*1 1 + 40	*2 2 + 70	*2 5 + 200	11 M Ω , <50 pF	1000 Vrms AC, 1000 V DC
5.0000 V								
50.000 V							10 M Ω , <50 pF	1000 Vrms AC, 1000 V DC
500.00 V								
1000.0 V	*2	*2	3 + 30 *2	—	—	—		

*1: At 5 to 100% of range *2: At 10 to 100% of range
Response time: 2 seconds or less
CMRR: 80 dB or greater for DC to 60 Hz (Rs = 1 k Ω)

• DC Voltage + AC Voltage (— V + ~ V)

Range	Accuracy				Input Impedance	Maximum Input Voltage
	DC, 10 – 20 Hz	DC, 20 Hz – 1 kHz	DC, 1 – 10 kHz	DC, 10 – 20 kHz		
5.000 V	*1 1.5 + 10	*1 1 + 10	*1 1 + 10	*1 2 + 10	11 M Ω , <50 pF	1000 Vrms AC, 1000 V DC
50.00 V						
500.0 V					11 M Ω , <50 pF	1000 Vrms AC, 1000 V DC
1000 V	*2	*2	—	—		

Range	Accuracy					Input Impedance	Maximum Input Voltage	
	10 – 20 Hz	20 Hz – 1 kHz	1 – 10 kHz	10 – 20 kHz	20 – 50 kHz			
5.000 V	*1 1.5 + 10	*1 0.5 + 10	*1 0.5 + 10	*1 1 + 10	*2 2 + 10	*2 5 + 20	11 M Ω , <50 pF	1000 Vrms AC, 1000 V DC
50.00 V								
500.0 V							10 M Ω , <50 pF	1000 Vrms AC, 1000 V DC
1000 V	*2	*2	—	—	—	—		

*1: At 5 to 100% of range *2: At 10 to 100% of range
Response time: Approximately 5 seconds
CMRR: 80 dB or greater for DC to 60 Hz (Rs = 1 k Ω)

• AC Current Measurement (~ A)

Range	Accuracy		Voltage Drop	Maximum Input Current
	10 – 20 Hz	20 Hz – 1 kHz		
500.00 μ A	1.5 + 20	1 + 20	<0.11 mV/ μ A	500 mA (fuse-protected)
5000.0 μ A				
50.000 mA				
500.00 mA				
5.0000 A				
10.000 A			<0.1 V/A	15 A (fuse-protected)

Range	Accuracy			Voltage Drop	Maximum Input Current
	10 – 20 Hz	20 Hz – 1 kHz	1 – 5 kHz		
500.00 μ A	1 + 20	0.75 + 20	1 + 30	<0.11 mV/ μ A	500 mA (fuse-protected)
5000.0 μ A					
50.000 mA					
500.00 mA					
5.0000 A					
10.000 A	1.5 + 20	1 + 20	2 + 30	<0.1 V/A	15 A (fuse-protected)

Shown above are the accuracy at 5 to 100% of range (10 to 100% for 10 A range).
Response time: 2 seconds or less

• DC Current Measurement (— A)

Range	Accuracy		Voltage Drop	Maximum Input Current
	734 01/02			
500.0 μ A	0.2 + 2		<0.11 mV/ μ A	500 mA (fuse-protected)
5000 μ A				
50.00 mA				
500.0 mA				
5.000 A				
10.00 A	0.6 + 2		<0.1 V/A	15 A (fuse-protected)

Response time: 1 second or less

• DC Current + AC Current (— A + ~ A)

Range	Accuracy		Voltage Drop	Maximum Input Current
	DC, 10 – 20 Hz	DC, 20 Hz – 1 kHz		
500.0 μ A	2 + 10	1.5 + 10	<0.11 mV/ μ A	500 mA (fuse-protected)
5000 μ A				
50.00 mA				
500.0 mA				
5.000 A				
10.00 A			<0.1 V/A	15 A (fuse-protected)

Range	Accuracy			Voltage Drop	Maximum Input Current
	DC, 10 – 20 Hz	DC, 20 Hz – 1 kHz	DC, 1 – 5 kHz		
500.0 μ A	1.5 + 10	1 + 10	1.5 + 10	<0.11 mV/ μ A	500 mA (fuse-protected)
5000 μ A					
50.00 mA					
500.0 mA					
5.000 A					
10.00 A	2 + 10	1.5 + 10	3 + 10	<0.1 V/A	15 A (fuse-protected)

Shown above is the accuracy at 5 to 100% of range (10 to 100% for 10 A range).
Response time: Approximately 5 seconds

• Resistance Measurement (Ω)

Range	Accuracy		Maximum Testing Current	Open-circuit Voltage	Input Protection Voltage
	734 01	734 02			
500.00 Ω	0.1 + 2	0.05 + 2	<1 mA	<2.5 V	600 Vrms
5.0000 k Ω					
50.000 k Ω					
500.00 k Ω					
5.0000 M Ω					
50.000 M Ω	0.5 + 2	1 + 2	<1.5 μ A	<0.13 μ A	

*1: Accuracy after zero calibration
Response time: 3 seconds or less for 500 Ω to 500 k Ω , 10 seconds or less for 5 M Ω to 50 M Ω

• Continuity Check (••)

Range	Continuity Beeper	Testing Current	Open-circuit Voltage	Input Protection Voltage
500.0 Ω	Buzzer sounds at 100 \pm 50 Ω or less.	Approx. 0.5 mA	<5 V	600 Vrms

• Diode Test (—K)

Range	Accuracy	Testing Current (Vf = 0.6 V)	Open-circuit Voltage	Input Protection Voltage
2.4000 V	1 + 2	Approx. 0.5 mA	<5 V	600 Vrms

• Temperature Measurement (TEMP)

Range	Accuracy	Input Protection Voltage
-50.0°C to 800.0°C	1 + 1.5°C	600 Vrms

Temperature probe:
Type K thermocouple sensor (optional)

• Capacitance Measurement (—F)

Range	Accuracy	Input Protection Voltage
5.000 nF	1 + 5	600 Vrms
50.00 nF		
500.0 nF		
5.000 μ F		
50.00 μ F		
500.0 μ F	2 + 5	
5.000 mF	3 + 5	
50.00 mF		

*1: Accuracy after zero calibration

• Frequency Measurement (Hz)

Range (auto-ranging)	Accuracy	Input Range
2.000 – 9.999 Hz	0.02 + 1	10 to 100% of range
9.000 – 99.99 Hz		
90.0 – 999.9 Hz		
900 – 9999 Hz		
9.000 – 99.99 kHz		
9.000 – 99.99 kHz		40 to 100% of range

Coupling type: AC coupling

• Duty Cycle Measurement (%)

Range	Accuracy	Input Range
10 – 90%	\pm 1% *1	40 to 100% of range

*1: For input of a square wave with a frequency within 10.00 to 500.0 Hz

• Peak Hold Function (PH)

Range	Accuracy	Response Time
DC V, DC A	\pm 100 digits	>1 ms

733
Series

Provides Safety Levels Demanded in Field Work

Model

733 01
733 02
733 03

3.5 digits

4000 count

RMS (733 03)

Terminal shutters

0.2% (733 02/03, DCV)

0.3% (733 01, DCV)



RMS and Mean Value Measurement Models Available

0.2% rdg + 1 dgt (733 02/03, for DC voltage)
0.3% rdg + 1 dgt (733 01, for DC voltage)
AC RMS value measurement (733 03)

**Increased Safety for Use in the Field
Safe Design Prevents Human Error**

Terminal shutters prevent erroneous insertion of test leads into current measurement terminals

If the function is switched to voltage measurement while a test lead is left inserted into a current measurement terminal, neither the fuse built into the current measurement circuit of the DMM nor the input protection circuit for voltage measurement can protect the circuits. The terminal shutters prevent the rotary switch from being moved from the current measurement function while a test lead is inserted into a current measurement terminal, thus preventing erroneous settings due to human error and ensuring the safety of the user. The terminal shutters open and close with operation of the function select (rotary) switch, so operation efficiency is not sacrificed.



Current measurement

Set to a current measurement function.



Terminal shutters are open.



Measurement other than current

Set to a function other than current measurement.



Terminal shutters are closed.

Employs high-performance fuses rated at 100 kA

Uses withstand current fuses with an arc extinguishing material for an assured prearcing time-current characteristic in the event of an excessive current.

Rated breaking current:
100 kA for both



Elastomer material used for impact absorption

An elastomer material that provides better grip and impact resistance than conventional ABS resin or polycarbonate is used for the casing of the meter thus improving both safety and ease of use.



To highlight the elastomer construction it is colored in this photograph.

Conforms to EN61010-10 Safety Standard

Conforms to overvoltage category AC/DC 1000 V, CAT II, and AC/DC 600 V CATIII.


Satisfying Performance with Concentrated Functionality

AC voltage measurement method selectable between RMS value and mean value measurement (733 03)


You can compare the waveform of the measured AC voltage with a sine wave to check for distortion. If the measured RMS value is not equal to the measured mean value, you can conclude that the waveform deviates from the sine wave.

Relative and percentage value computation


Displays the measured values as relative values with respect to a reference measurement or as the percentages with respect to the reference measurement.



Sets currently measured value as reference value.



Displays only the differential (the voltage has decreased to 90 V).



Displays the change as a percentage (%).

Zero calibration for stray capacitance when checking capacitors (733 02/03)

The stray capacitance of the instrument can be zeroed by using this function with the test leads open (only when the 10 nF range is selected).

Auto hold function

Just removing the test leads from the measured object retains the measured value. Because the measurement is held, there is no need to operate the hold switch for each measurement, freeing both hands for performing safe and accurate measurements with the test leads.




Emits intermittent beeps when measurement has stabilized.

Data is retained by simply removing test leads.


Make reliable measurements using both hands

User calibration

You can easily perform calibration and adjustment using the panel keys on the multimeter and standard instrument—optimal for maintaining accuracy of measurement instruments required by ISO9000 international standards for quality systems.

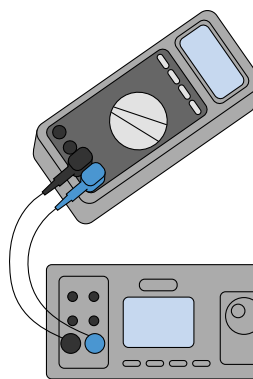


Standard Instrument



The calibration mode is enabled by powering up the multimeter using special procedures.

Input the standard value




Adjustment is performed with a single key operation.

General Specifications of Models 734 01 / 734 02 **Optional Accessories**

Additional Functions	Relative and percentage value computation, data / auto hold, overvoltage warning
Display	Digital display: 40,000-count digital reading; 40-segment bar graph
Measuring Rate	Digital display: 2.3 times/sec Bar graph display: 23 times/sec
Operating Temp. and Humidity	-10°C to 50°C; 80% RH or less at -10°C to 40°C, or 70% RH or less at 40°C to 50°C (no condensation)
Storage Temp. and Humidity	-20°C to 60°C, 70 RH or less (no condensation)
Temperature Coefficient	Add the accuracy (0.1/°C to the basic accuracy at a temperature within -10°C to 18°C and 28°C to 50°C
Withstanding Voltage	5.55 kV AC for 1 minute (between input terminals and casing)
Power Supply	Two AA (R6) dry cells
Battery Life	733 01: Approx. 1000 hours (for continuous DC voltage measurement with alkaline cells)
Auto Power Off	733 02/03: Approx. 350 hours measurement with alkaline cells The power is automatically turned off when no operation is made for approx. 20 minutes (can be disabled).
Dimensions	85 (W) x 191 (H) x 40 (D) mm
Weight	Approximately 450 g (including batteries)
Compliance with Standards	Safety EN61010-1 (1995); EN61010-2-031 (1995) (AC/DC 1000 V, CAT II; AC/DC 600 V, CAT III)
	EMC EMI: EN55011 (1998); EN61326-1 (1998) + A1(Class B, Group 1)
	EMS: EN50082-1 (1997); EN61326-1 (1998) + A1
Standard Accessories	Instruction manual:1, Test lead set (RD031):1, AA (R6) dry cells(built in):2

Name	Model	Specification
Fuse	A1518EF	500 mA/600 V
	A1519EF	15 A/600 V
Test leads	RD031	Red / black (1 set)
Thermistor probe	2349 01	-50°C to 150°C
Carrying case (hard)	B9646HH	Houses the DMM and test leads



Performance

Test conditions: Temperature and humidity = 23°C ± 5°C, 80% RH or less; Accuracy = ±(% rdg + dgt).
Note: A response time is the time required for achieving the accuracy specified for the corresponding range.

• DC Voltage Measurement (V_{DC})

Range	Accuracy		Input Resistance	Maximum Input Voltage
	733 01	733 02/03		
400.0 mV fixed	0.3% + 1	0.2% + 1	10 MΩ	1000 Vrms AC, 1000 V DC
4.000 V			11 MΩ	
40.00 V			10 MΩ	
400.0 V				
1000 V				

Response time: 1 second or less

• AC Voltage Measurement (V_{AC})

Model 733 01 Mean-value detection and RMS-value calibration

Range	Accuracy			Input Impedance	Maximum Input Voltage
	50/60 Hz	50 – 500 Hz	500 Hz – 1 kHz		
400.0 mV fixed	0.5% + 2	1% + 2	1.5% + 4	10 MΩ, <50 pF	1000 Vrms AC, 1000 V DC
4.000 V				11 MΩ, <50 pF	
40.00 V				10 MΩ, <50 pF	
400.0 V					
1000 V					

Response time: 2 seconds or less

Model 733 02 Mean-value detection and RMS-value calibration

Range	Accuracy			Input Impedance	Maximum Input Voltage
	50/60 Hz	50 – 500 Hz	500 Hz – 1 kHz		
400.0 mV fixed	0.5% + 2	0.75% + 2	1.5% + 4	10 MΩ, <50 pF	1000 Vrms AC, 1000 V DC
4.000 V				11 MΩ, <50 pF	
40.00 V				10 MΩ, <50 pF	
400.0 V					
1000 V					

Response time: 2 seconds or less

Model 733 03 RMS detection, and mean-value detection and RMS-value calibration(except 400 mV range)

Range	Accuracy			Input Impedance	Maximum Input Voltage
	50/60 Hz	50 – 500 Hz	500 Hz – 1 kHz		
400.0 mV fixed	0.5% + 5 ^{*1}	1% + 5 ^{*1}	1.5% + 5 ^{*1}	10 MΩ, <50 pF	1000 Vrms AC, 1000 V DC
4.000 V				11 MΩ, <50 pF	
40.00 V				10 MΩ, <50 pF	
400.0 V					
1000 V					

Response time: 2 seconds or less; crest factor: <3
^{*1}: 5 to 100% of F.S., or 200 to 1000 V for 1000 V range:

• DC Current Measurement (I_{DC})

Range	Accuracy		Voltage Drop	Maximum Input Current
	733 01	733 02/03		
400.0 μA	1% + 2	0.5% + 2	<0.11 mV/μA	400 mA (500 mA/600 V fuse-protected)
4000 μA			<2.5 mV/mA	
40.00 mA				
400.0 mA				
10.00 A			1.2% + 2	<0.1 V/A

Response time: 1 second or less

• AC Current Measurement (I_{AC})

Model 733 01 Mean-value detection and RMS calibration

Range	Accuracy		Voltage Drop	Maximum Input Current
	50/60 Hz	40 Hz – 1 kHz		
400.0 μA	1% + 5	1.5% + 5	<0.11 mV/μA	400 mA (500 mA/600 V fuse-protected)
4000 μA			<2.5 mV/mA	
40.00 mA				
400.0 mA				
10.00 A			1.2% + 5	<0.1 V/A

Response time: 2 seconds or less

• AC Current Measurement (I_{AC})

Models 733 02/733 03 RMS-value detection (733 03 only), and mean-value detection and RMS calibration

Range	Accuracy		Voltage Drop	Maximum Input Current
	50/60 Hz	40 Hz – 1 kHz		
400.0 μA	0.75% + 5 ^{*1}	1.5% + 5 ^{*1}	<0.11 mV/μA	400 mA (500 mA/600 V fuse-protected)
4000 μA			<2.5 mV/mA	
40.00 mA				
400.0 mA				
10.00 A			1% + 5 ^{*1}	<0.1 V/A

Response time: 3 sec or less; crest factor: <3 (733 03 only)
^{*1}: 5 to 100% of F.S., 2 – 10 A for 10 A range (733 03 only)

• Resistance Measurement (Ω)

Range	Accuracy		Maximum Testing Current	Open-circuit Voltage	Input Protection Voltage
	733 01	733 02/03			
400.0 Ω	0.5% + 1 [*]	0.4% + 1 [*]	<1.4 mA	<2.5 V	600 Vrms
4.000 kΩ			<120 μA		
40.00 kΩ			<13 μA		
400.0 kΩ			<1.3 μA		
4.000 MΩ			0.5% + 1		
40.00 MΩ	1% + 2	<130 nA			

Response time: 2 seconds or less for 400 Ω range, 10 seconds or less for 4 MΩ range or greater
^{*}: Accuracy after zero calibration for 400 Ω range

• Continuity Check (⦿)

Range	Continuity Beeper	Maximum Testing Current	Open-circuit Voltage	Input Protection Voltage
400.0 Ω	Buzzer sounds at 20 Ω or less.	0.8 mA	<3.4 V	600 Vrms

• Diode Test (→|←)

Range	Accuracy	Testing Current (V _f = 0.6 V)	Open-circuit Voltage	Input Protection Voltage
2.000 V	1% + 2	Approximately 0.5 mA	<3.4 V	600 Vrms

• Temperature Measurement (TEMP)

Range	Accuracy	Input Protection Voltage
-50.0°C to 150.0°C	0°C to 70.0°C: ± 1°C -30.0°C to 0°C or 70.0°C to 150.0°C: ± 2°C	600 Vrms

Accuracy when used in combination with optional thermistor probe (2349 01)

• Capacitor Check (⇄)

Models 733 02/733 03 (function not available with 733 01)

Range	Accuracy	Input Protection Voltage
10.00 nF	2% + 10 (after zero calibration)	600 Vrms
100.0 nF		
1000 nF	2% + 5	600 Vrms
10.00 μF		
100.0 μF		
1000 μF	3% + 5	

• Frequency Measurement (Hz)

Models 733 02/733 03 (function not available with 733 01)

Range	Accuracy		Input Voltage Range	Maximum Input Voltage
	733 02/03			
10.00 – 99.99 Hz	0.02% + 1		0.2 – 400 Vrms	600 Vrms
90.0 – 999.9 Hz				
900 – 9999 Hz				
9.00 – 99.99 kHz				

Coupling type: AC coupling

Model

- 732 01
- 732 02
- 732 03
- 732 04

3.5 digits

4300 count



• Photo shows the 73203 with optional rubber case.



- Compact size, ideal for carrying
- Large display for easy viewing
- Safe design allows measurement in excess of 20 A (excluding 732 04)
- Special model for voltage measurement (732 04)
- Simple auto hold function
- Capacitors can be checked (732 02/732 03)

General Specifications

Additional Functions	Auto hold, overvoltage and current warning
Display	Digital display: 4300-count digital reading
Measuring Rate	Digital display: Approx. 2 times/sec
Operating Temp. and Humidity	0 to 50 °C; 80% RH or less at 0 °C to 40 °C, or 70% RH or less at 40 °C to 50 °C (no condensation)
Storage Temp. and Humidity	-20 °C to 60 °C, 70 RH or less (no condensation)
Temperature Coefficient	Add accuracy x 0.1/ °C to the basic accuracy at a temperature within 0 °C to 18 °C and 28 °C to 50 °C
Withstanding Voltage	3.7 kV AC for 1 minute (between input terminals and casing, for 732 01, 732 02, 732 03) 5.55 kV AC for 1 minute (between input terminals and casing, for 732 04)
Power Supply	Two AAA (LR03 or R03) dry cells
Battery Life	Approx. 600 hours (for continuous DC voltage measurement with alkaline cells)
Auto Power Off	The power is automatically turned off when no operation is made for approx. 20 minutes (can be disabled). N/A for 732 04
Dimensions	74 (W) x 155 (H) x 31 (D) mm
Weight	Approx. 240 g (including batteries)
Compliance with Standards	Safety EN61010-1 (1995) + Amend; EN61010-2-031 (1995) (600 V, CAT II; 300 V, CAT III; contamination level 2, indoor use: 732 01, 732 02, 732 03) (600 V, CAT III; contamination level 2, indoor use: 732 04) EMC EMI: EN55011 (1991) (Class B, Group 1) EMS: EN50082-1 (1997)
Standard Accessories	Instruction manual: 1 Test lead set (RD031): 1 AAA (LR03/R03) dry cells (built in): 2 Spare fuse F05 (500 mA/250 V, not included for 732 04): 1 Spare fuse F02 (15 A/250 V, not included for 732 04): 1

Options

Option Code	Specification
732□□/R	With rubber case

Optional Accessories

Name	Model	Specification
Fuse	F05	500 mA/600 V
	F02	15 A/600 V
Test leads	RD031	Red / black (1 set)
Carrying case (hard)	B9646GB	Houses the DMM and test leads
Rubber case	93007	For DMM

Performance

Test conditions: Temperature and humidity = 23 °C ± 5 °C, 80% RH or less; Accuracy = ±(% of reading + digits).
Note: Response time is the time required for achieving accuracy specified for the corresponding range.

• DC Voltage Measurement (V_{DC})

Range	Accuracy			Input Resistance	Maximum Input Voltage
	732 01	732 02/732 04	732 03		
400.0 mV				>100 MΩ	600 V
4.000 V	0.5% + 1			11 MΩ	
40.00 V		0.5% + 1	0.3% + 1	10 MΩ	
400.0 V	0.75% + 1				
600.0 V					

Response time: 1.5 seconds or less for 400 mV range, 1 second or less for all other ranges

• AC Voltage Measurement (V_{AC})

Mean-value detection and RMS-value calibration

Range	Accuracy			Input Resistance	Maximum Input Voltage
	732 01	732 02	732 03/732 04		
4.000 V				>11 MΩ, <50 pF	600 Vrms
40.00 V		1% + 5		>10 MΩ, <50 pF	
400.0 V			0.75% + 5		
600.0 V					

Response time: 2 seconds or less

• DC Current Measurement (A_{DC})

Not available with 732 04

Range	Accuracy			Voltage Drop	Maximum Input Current
	732 01	732 02	732 03		
400.0 μA *1				<0.17 mV/μA	400 mA (500 mA/600 V fuse-protected)
4000 μA		1% + 2		<3 mV/mA	
40.00 mA *1					
400.0 mA					10 A (15 A/600 V fuse-protected)
4.000 A		2% + 2			
10.00 A *2					

*1: Drift in the least significant digit may occur.

*2: Measurement of 11 to 20 A can be performed within 30 seconds. A warning buzzer sounds when 30 seconds have passed.

Response time: 1 second or less

• AC Current Measurement (A_{AC})

Not available with 732 04

Mean-value detection and RMS-value calibration

Range	Accuracy (40 – 500 Hz)			Voltage Drop	Maximum Input Current
	732 01	732 02	732 03		
400.0 μA*1		2% + 20		<0.17 mV/μA	400 mA (500 mA/600 V fuse-protected)
4000 μA		2% + 5		<3 mV/mA	
40.00 mA*1		2% + 20			
400.0 mA		2% + 5			10 A (15 A/600 V fuse-protected)
4.000 A		2.5% + 20			
10.00 A*2					

*1: Drift in the least significant digit may occur.

*2: Measurement of 11 to 20 A can be performed within 30 seconds. A warning buzzer sounds when 30 seconds have passed.

Response time: 2 second or less

• Resistance Measurement (Ω)

Range	Accuracy		Maximum Testing Current	Open-circuit Voltage	Input Protection Voltage
	732 01 to 732 04				
400.0 Ω	0.75% + 2		<1 mA	<3.4 V	600 V
4.000 kΩ			<0.5 mA	<1.0 V	
40.00 kΩ	0.75% + 1		<70 μA	<0.7 V	
400.0 kΩ			<7 μA		
4.000 MΩ	2% + 1		<0.7 μA		
40.00 MΩ	5% + 2		<70 μA		

Response time: 1 second or less for 400 kΩ range or less, 5 seconds or less for 4 MΩ range, 15 seconds or less for 40 MΩ range

• Continuity Check (⌚)

Range	Continuity Beeper		Open-circuit Voltage	Input Protection Voltage
	732 01 to 732 04			
400.0 Ω	Buzzer sounds at 50 ± 20 Ω or less		<3.4 V	600 V

Response time: 0.2 second or less (buzzer response)

• Diode Test (⌚)

Range	Accuracy		Open-circuit Voltage	Input Protection Voltage
	732 01 to 732 04			
2.00 V	1% + 1 (testing current 1 mA or less)		<3.4 V	600 V

Response time: 1 second or less

• Capacitor Check (⌚)

Range	Accuracy			Input Protection
	732 01/732 04	732 02	732 03	
10.00 nF	Not available	2% + 5, typical (20 nF range: Accuracy after zero calibration)		500 mA/250 V fuse-protected

Response time: 1 second or less



7537 02



7537 04

Model
7537 01
7537 02
7537 03
7537 04

- 3.5 digits
- Terminal shutters
- 4000 count
- 0.1% (7537 04.DC)
- RMS (7537 04)



- Shutters preventing erroneous insertion into current terminals
- Excessive input/erroneous input warning alarm
- Fuse burnout check function
- Auto hold function
- Low-frequency measurement (7537 03/04)
- Dual display (7537 03/04)

Refer to page 10 for optional accessories.

Test conditions: Temperature and humidity = 23°C ± 5°C, 80% RH or less; Accuracy: ± (% of reading + digits)

Model	7537 01	7537 02	7537 03	7537 04	
Display	Digital display: 4000-count digital reading; bar graph: 40 segments				
Back Light	—	✓	—	—	
Measuring Rate	Digital display: 2.3 times/sec; bar graph: 23 times/sec				
Measurement Functions	DC Voltage	400.0 mV – 1000 V	40.00 mV – 1000 V		
	Basic Accuracy	0.3% + 1		0.2% + 1	
	AC Voltage	40.00 mV – 1000 V	40.00 mV – 1000 V		
	Basic Accuracy	1% + 2		0.5% + 2	
	DC Voltage + AC Voltage	—			4.000 – 1000 V
	Basic Accuracy	—			1% + 4
	DC Current	400.0 μA – 10 A			
	Basic Accuracy	0.5% + 2			
	AC Current	400.0 μA – 10 A			
	Basic Accuracy	1.5% + 5	—		1.5% + 4
	Resistance	400.0 Ω – 40.00 MΩ			
	Basic Accuracy	0.5% + 1		0.2% + 1	
	Frequency	5 Hz – 99.99 kHz		2.00 Hz – 200.0 kHz	
	Temperature	-50°C to 150°C (with thermistor sensor)			-50°C to 70°C (with type K thermocouple sensor) -50°C to 150°C (with thermistor sensor)
	Capacitance	—			10 nF – 1000 μF
Continuity Check	Buzzer sounds at approximately 20 Ω or less.				
Additional Functions	Maximum/minimum value memory, relative value calculation, data/auto hold, overvoltage warning, diode test				
Withstanding Voltage	5.55 kV AC for 1 minute (between input terminals and casing)				
Power Supply	Two AA (LR6 or R6) dry cells				
Battery Life	Approx. 1000 hours (for continuous DC voltage measurement with alkaline cells)		Approx. 600 hours (for continuous DC voltage measurement with alkaline cells)		
Auto Power Off	The power is automatically turned off when no operation is made for approximately 30 minutes (can be disabled).				
Dimensions	87 (W) x 190 (H) x 39 (D) mm				
Weight	Approx. 420 g (including batteries)		Approx. 440 g (including batteries)		
Compliance with Standards	Safety	EN61010-1 (1993); EN61010-2-031 (1995) (AC/DC 1000 V, CAT II; AC/DC 600 V, CAT III)			
	EMC	EMI: EN50081-1 (1992); EN55022 (Class B) EMS: EN50082-1 (1992)			
Standard Accessories	Instruction manual: 1, Test lead set (RD031): 1, AA cells(built in): 2, Spare fuse F05 (500 mA/250 V): 1				

7536 03

Pocket DMM with Superb Portability

7536 03

Model
7536 03



3.5
digits

3200
count

Refer to page 10 for optional accessories.

Test conditions: Temperature and humidity = 23°C ± 5°C, 80% RH or less;
Accuracy = ±(% of reading + digit)

Model	753603	
Display	Digital display: 3200-count digital reading; bar graph: 32 segments	
Measuring Rate	Digital display: 2 times/sec; bar graph: 12 times/sec	
Measurement Functions	DC Voltage (basic accuracy)	300.0 mV – 450 V (0.7% + 2)
	AC Voltage (basic accuracy)	3.000 – 450 V (2.3% + 5)
	Resistance (basic accuracy)	300.0 Ω – 30.00 MΩ (2% + 2)
Continuity Check	Buzzer sounds at approximately 20 Ω or less.	
Additional Functions	Data hold, diode test	
Usable Circuit Voltage	250 V or less	
Power Supply	Two LR44 or SR44 dry cells	
Battery Life	Approx. 250 hours (for continuous DC voltage measurement with SR44 cells)	
Auto Power Off	The power is automatically turned off when no operation is made for approximately 10 minutes (can be disabled).	
Dimensions	51 (W) x 106 (H) x 10 (D) mm	
Weight	Approx. 110 g (including batteries and case)	
Safety Standards	Conforms to EN61010-1 safety standard	
Standard Accessories	Instruction manual: 1, LR44 cells: 2, Pocketbook-style case: 1	

4.5-digit Bench-top DMM Provides Improved Operability

740

740 Series

- Employs easy-to-operate rotary switch
- Needs no warm-up for DC voltage and resistance measurements
- Comparator function is standard feature (740 01)
- Battery unit (Ni-MH cell) is standard feature (740 02)
- Numerous optional units such as RS-232C interface

Model
740 01
740 02
740 03

4.5
digits

50,100
counts






RMS



Model	74001	74002	74003
Display	LED display: 50/100-count digital reading		
Measuring Rate	50 to 10 times/sec		
Measurement Functions	DC (basic accuracy)	500.0 mV – 500 V (0.05% + 2)	500.0 mV – 600 V (0.04% + 2)
	AC (basic accuracy)	500.0 mV – 500 V (0.5% + 10)	500.0 mV – 600 V (0.5% + 10)
	DC A (basic accuracy)	—	500.00 μA – 500.00 mA (0.15% + 2)
	AC A (basic accuracy)	—	500.00 μA – 500.00 mA (0.4% + 10)
	Ω (basic accuracy)	500.00 μA – 500.00 mA (0.15% + 2)	500.00 Ω – 50.000 MΩ (0.06% + 2)
	Hz	—	3.00 Hz – 999.99 kHz
	Temperature	—	-50.0°C to 1200°C (with type K thermocouple sensor)
Continuity Check	—	Buzzer sounds at 100 ± 50 Ω or less.	
Comparator	✓	—	—
Measuring Rate Switching	(Selectable between "Slow" and 2 – 4 time/sec)	—	—
Relative Value Computation	✓	✓	✓
Data / Auto Hold	✓	✓	✓
Peak Hold	—	✓	✓
Overvoltage Input Warning	✓	✓	✓
Moving Ave. Computation	✓	✓	✓
Diode Test	✓	✓	✓
Withstanding Voltage	3.7 kV AC for 1 minute (between input terminals and casing)		
Power Supply	100 – 240 V AC	100 – 240 V AC or rechargeable battery (Ni-MH cell) unit	100 – 240 V AC
Battery Life	—	Approx. 10 hrs. (for continuous DC measurement)	—
Dimensions	245 (W) x 88 (H) x 240 (D) mm		
Weight	Approx. 2.4 kg	Approx. 2.6 kg	Approx. 2.4 kg
Safety Standards	Conforms to EN 61010-1 safety standard (AC/DC 600V, CAT II)		
Standard Accessories	Instruction manual: 1, Test lead set (RD031): 1, AC power cord: 1, Spare fuse F05 (500 mA/250 V for current terminal of 74002/74003): 1		

Test conditions: Temperature and humidity = 23°C ± 5°C, 80% RH or less; Accuracy: ±(% of reading + digits)

Optional Accessories and Spare Parts


Name	Model	Specification	Applicable DMM Models	Appearance
DMM communication package	92010-E	Communication cable (D-Sub 9-pin female) + special software	734 series	
	92010-E/P	Printer cable added to 92010-E	734 series	
Printer	97010	Thermal printer (paper width: 112 mm)	734 series	
AC adapter for printer	94006 94007	(For Europe) 230 VAC ± 10% (For USA) 120 VAC ± 10%	734 series	
Thermal print paper	97080	One package of 10 rolls	734 series	
Test leads	RD031	L-plug, Red / black(1set)	7342, 733, 734, 7537, and 740 series (applicable to all models except 7536)	
	B9646HA	Red / black(1set)	7536 03	
Alligator clips	B9646HF	Red / black(1set)	All models	
Fuse	F02	15 A/250 V	732 01 / 732 02 / 732 03	
	F03	15 A/600 V	7537 series	
	F05	500 mA/250 V	732 01 / 7320 2 / 732 03, 7537 series, and 740 series (N/A for 740 01)	
	A1518EF	500 mA/600 V	733 / 734 series	
	A1519EF		733 / 734 series	
Rubber case	93007		732 series	
Carrying Case	B9646GB	Hard case	732 series	
	B9646HH	Hard case	733 / 734 series	
	93014	Hard case (also for housing RS-232C cable)	734 series	
	93003	Soft case	740 series	
Pocketbook-style case	B9646HB	Hard case	7536 03	
Thermistor probe	234901	-50°C to 150°C (for liquid)	733 / 7537 series	
Temperature (thermocouple type K) probe	751102	-50°C to 800°C (for liquid)	734 series, 7537 04, and 740 series (N/A for 740 01)	
	751103	-50°C to 600°C (for liquid)	734 series, 7537 04, and 740 series (N/A for 740 01)	
	751104	-20°C to 600°C (for surface)	734 series, 7537 04, and 740 series (N/A for 740 01)	
	751105	-20°C to 200°C (for surface)	734 series, 753704, and 740 series (N/A for 740 01)	
Current clamp probe	96001	For 400 A AC; 10 mV/A AC output Note: Use AC voltage range of the DMM. Note: Need to convert the meter reading. EX) read the DMM indication of 1 V as 100 A.	All models except 7536	
Hygrothermal probe	90001	0 to 95% RH; 1 mV/% RH output -10°C to 50°C; 1 mV/°C output Note: Use DC mV range of the DMM. Note: Need to convert the meter reading. EX) read the DMM indication of 50 mV as 50% RH.	All models except 7536	
Nickel hydride battery	FE033	Battery pack	740 02	
Comparator cable	91004	1.6 m long	740 01	

Basic Usage Digital Multimeters

Voltage/Resistance Measurement

The COM terminal and V/Ω terminal are used. To measure a voltage, set the dial to voltage measurement. To measure a resistance, set the dial to resistance measurement. Some DMM models can also display the frequency and calculated decibel value at the same time when measuring an AC voltage. During resistance measurement, it is possible to switch the function to checking of the continuity of the measured circuit.


Measuring a Voltage and Resistance

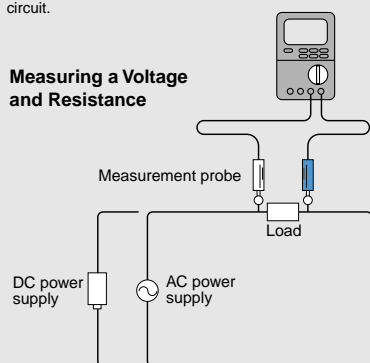

Current Measurement

The COM terminal, and A, μA or mA terminal are used. Some models have shutters for preventing erroneous insertion into the current terminals and allow a contact of a lead to a current terminal only when the dial is set to current measurement. For these models, you cannot set the dial to voltage measurement while a lead is left inserted into a current terminal. This feature provides greater safety.


Measuring a Current

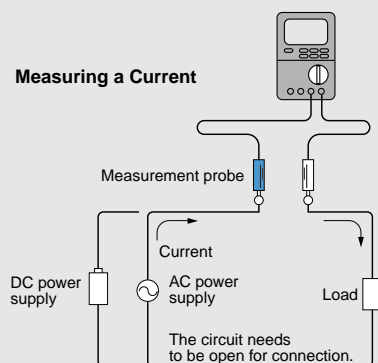







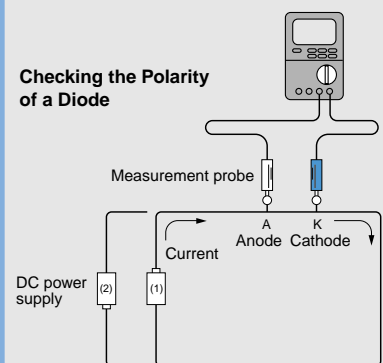





Diode Test

A current flows through a diode when the power supply is connected as (1) below, while, almost no current flows when the power supply is connected as (2). The diode test function applies an adequate forward voltage across a diode to make a constant current flow and measures the voltage drop in the forward direction to determine the forward and reverse directions of the diode.

Checking the Polarity of a Diode



Digital Multimeter Selection Guide

Model	Type	Display		Measurement Items											Additional Functions						External View																
		Max. Value	Dual	Dual	Bar Graph	Back-lit	AC RMS	Voltage	AC + DC	Current	AC + DC A	Resistance	Continuity Check	Diode Test	Frequency	Temperature	Capacitance	Communication	Data Memory	Max./Min. Value Memory		Relative Value Memory	Logarithm Computation	Data Hold	Auto Hold	Peak Hold	Over-voltage Input Warning	Comparator	Auto Power Off								
734 01		50000	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
734 02			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
733 01	Handheld	4000		●		●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
733 02			●			●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
733 03			●		●	●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
7537 01			●	●		●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
7537 02	●	●	●		●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
7537 03	●	●		●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
7537 04	●	●	●	●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
732 01		4300				●	●	●	●	●	●	●	●	●	●									◎		●	●	●	●	●	●	●	●	●			
732 02						●	●	●	●	●	●	●	●	●	●	●								◎		●	●	●	●	●	●	●	●	●	●		
732 03						●	●	●	●	●	●	●	●	●	●	●									◎		●	●	●	●	●	●	●	●	●	●	
732 04						●	●	●	●	●	●	●	●	●	●	●									◎		●	●	●	●	●	●	●	●	●	●	
7536 03	Pocket-sized	3200	●				●	●	●	●	●	●	●	●																							
740 01	Bench-top	50100				●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
740 02						●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
740 03						●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

◎ : Also functions as excessive current input warning.

YOKOGAWA 
Yokogawa M&C Corporation

World Wide Web site at
http://www.yokogawa.co.jp/MCC/Welcome_e.htm

⚠ NOTICE

● Before using the product, read the instruction manual carefully to ensure proper and safe operation

YOKOGAWA M&C CORPORATION
International Sales Dept.

Kojimachi-Tokyu Bldg. 3F
6-6 Koji-machi, Chiyoda-ku, Tokyo, 102-0083 Japan
Phone: +81-3-3239-0576 Facsimile: +81-3-3239-0585

YOKOGAWA CORPORATION OF AMERICA
2 Dart Road, Newnan, GA. 30265-1094 U.S.A.
Phone: +1-770-253-7000 Facsimile: +1-770-251-2088

YOKOGAWA EUROPE B. V.
Vanadiumweg 11 Amersfoort, 3812PX THE NETHERLANDS
Phone: +31-334-64-1611 Facsimile: +31-334-64-1610

YOKOGAWA ENGINEERING ASIA PTE. LTD.
5 Bedok South Road, Singapore 469270 SINGAPORE
Phone: +65-241-9933 Facsimile: +65-241-2606

YOKOGAWA AMERICA DO SUL S.A.
Praça Acapulco, 31-Jurubatuba, São Paulo/SP, 04675-190 BRAZIL
Phone: +55-11-548-2666, ext. 200/320
Facsimile: +55-11-521-4653/522-5231

YOKOGAWA MEASURING INSTRUMENTS
KOREA CORPORATION
City Air Tevminel Bldg., 405-9, #159-6, Samsung-dong,
Kangnam-ku, Seoul, KOREA
Phone: +82-2-551-0660 to 0664 Facsimile: +82-2-551-0665

YOKOGAWA AUSTRALIA PTY. LTD.
Court D1, 25-27 Paul Street North, North Ryde,
NSW 2113, AUSTRALIA
Phone: +61-2-9805-0699 Facsimile: +61-2-9888-1844

YOKOGAWA BLUE STAR LTD.
40/4 Lavelle Road, Bangalore, 560 001 INDIA
Phone: +91-80-227-1513 Facsimile: +91-80-227-4270

YOKOGAWA MIDDLE EAST E.C.
P.O. Box 10070 Diplomatic Area, Building Nos. 161, Road 4304
Area 343, Mina Sulman Industrial Area, STATE OF SAUDI ARABIA
Phone: +973-826644 Facsimile: +973-826633

LTD. YOKOGAWA ELECTRIC
Gorkholskiy per. 13, Build. 2, 4th Floor, Moscow, 129010
RUSSIAN FEDERATION
Phone: +7-095-737-7868 Facsimile: +7-095-737-7869

Represented by:

MCK-EM7