# General Specifications

GS 77J1D01-01E

VJD1
Tachometer-signal Transmitter
(Isolated Single-output and Isolated Dual-output Models)

**NTXUL** 

# **■ Input/Output Specifications**

Type of input: 0 to  $V_{100}$  V AC ( $V_{100}$ : voltage for 100% input)

where,  $16 \le V_{100} \le 150 \text{ V AC}$ .

Input frequency range: 15 Hz  $\leq$  F<sub>100</sub>  $\leq$  1 kHz (F<sub>100</sub>: frequency for 100% input)

Maximum allowable overrange input: 120% (continuous) Output signal: DC voltage or DC current

Allowable load resistance:

• Output 1

Output Range Output Range 4 to 20 mA DC: 750  $\Omega$  maximum 0 to 10 mV DC: 250 k $\Omega$  minimum 0 to 100 mV DC: 250 k $\Omega$  minimum 2 to 10 mA DC: 1500  $\Omega$  maximum 1 to 5 mA DC: 3000 Ω maximum 0 to 1 V DC: 2 kΩ minimum 0 to 10 V DC:  $10 \text{ k}\Omega$  minimum 0 to 20 mA DC: 750 Ω maximum 0 to 16 mA DC: 900  $\Omega$  maximum 0 to 5 V DC: 2 kΩ minimum 0 to 10 mA DC: 1500  $\Omega$  maximum 1 to 5 V DC: 2 kΩ minimum 0 to 1 mA DC: 15 k $\Omega$  maximum -10 to +10 V DC: 10  $k\Omega$  minimum

• Output 2

Output Range Output Range 4 to 20 mA DC: 350  $\Omega$  maximum 1 to 5 V DC: 2 k $\Omega$  minimum

Zero and span adjustment: Within  $\pm 5\%$  of span for both zero and span adjustment


#### **■** General

The VJD1 is a compact, plug-in tachometer-signal transmitter that receives single-phase, AC voltage signal from an electric tachometer and converts it into isolated DC voltage or DC current signals.

The VJD1 transmitter features:

- AC-to-DC conversion based on mean-value rectification;
- four isolated ports (input, output-1, output-2, power supply and grounding) on a dual-output model;
- a withstanding voltage of 2000 V AC;
- a wide supply voltage range supporting both 100 V and 200 V power lines of AC or DC; and
- close side-by-side mounting.

#### **■ Model and Suffix Codes**

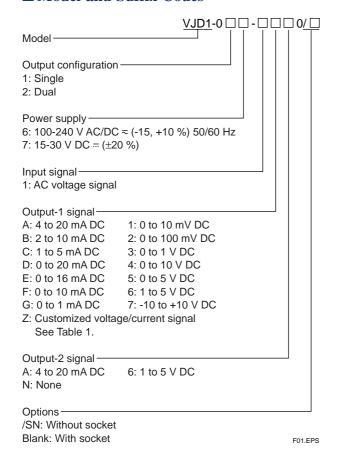

#### • Items to be specified when ordering

- Model and Suffix Code: e.g. VJD1-026-1AA0
- Input range: e.g. 0 to 35 V AC

#### **■** Standard Performance

Accuracy rating:  $\pm 0.3\%$  of span; accuracy is not guaranteed for output level less than 0.5% of the span of a 0 to X mA output range types.

Response: 2.4 sec. for a 63% response (10 to 90% change of range)

Insulation resistance:  $100~\text{M}\Omega$  minimum at 500~V DC between input, output-1, output-2, power supply and grounding terminals mutually

Withstanding voltage: 2000 V AC for one minute input, (output-1, output-2), power supply and grounding terminals mutually; 1000 V AC for one minute between output-1 and output-2 terminals

Operating temperature range: 0 to 50°C

Operating humidity range: 5 to 90% RH (no condensation) Supply voltage range:  $100-240 \text{ V AC/DC} \approx (-15, +10\%)$  50/60 Hz or  $15-30 \text{ V DC} = (\pm 20\%)$ 

Effects of power line regulation: Up to  $\pm 0.2\%$  of span for a supply voltage range of 85 to 264 V AC (47 to 63 Hz), 85 to 264 V DC or 12 to 36 V DC

Effects of ambient temperature variations: Up to  $\pm 0.2\%$  of span per  $10^{\circ}\text{C}$ 

Current consumption: 122 mA at 24 V DC

Power consumption: 5.4 VA at 100 V AC; 7.5 VA at 200 V AC

#### **■** Mounting and Appearance

Material: ABS resin (casing)

Mounting: Wall mounting, DIN rail mounting, or mounting on a side-by-side multiple mounting base

Connection: Terminals with M3 size screws

External dimensions: 76 (H)  $\times$  29.5 (W)  $\times$  124.5 (D) mm Weight: Main unit = approx. 110 g; socket = approx. 51 g

#### Accessories

Tag number label: One

# **■** Customized Signal Specifications


Table 1 Manufacturable Ranges

	Current Signal	Voltage Signal
Input range	-	0 to 150 V AC
Span	-	16 mV to 150 V AC
Zero elevation	-	0% only
Output range	0 to 24 mA DC	-10 to +10 V DC
Span	1 to 24 mA DC	10 mV to 20 V DC
Zero elevation	0 to 200%	-100% to +200%



T01.EPS

# **■** Terminal Assignments




1	INPUT	(V)
2	OUTPUT 2	(+)
3	INPUT	(±)
4	N.C.	
5	OUTPUT 2	(-)
6	N.C.	
7	OUTPUT 1	(+)
8	GND	
9	OUTPUT 1	(-)
10	SUPPLY	(L+)
11	SUPPLY	(N-)

Note: For single-output models, OUTPUT2 is N.C.

F03.EPS

## **■** Block Diagram

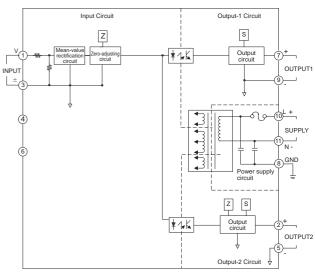


F02.EPS

Note: Single-output models do not contain the output-2 circuit.

F04.EP

### **■** External Dimensions

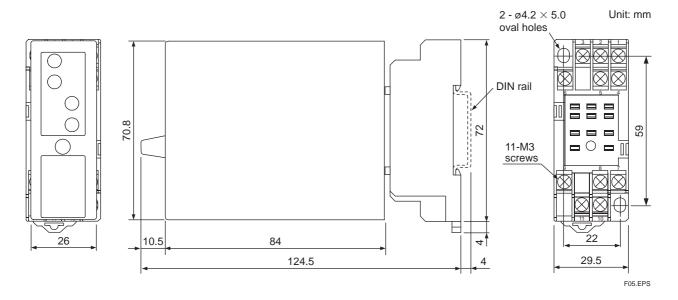

• The information covered in this document is subject to change without notice for reasons of improvements in quality and/or performance.